

Suprema

FaceStation 2 with Temperature Detection



Suprema FaceStation 2 with Temperature Detection combines Suprema's face recognition terminal* with Suprema Thermal Camera to detect users with elevated skin temperature.

- Suprema Thermal Camera measures skin temperature of a subject's face using advanced thermography technology.
- FaceStation 2 displays the temperature on a GUI raising alerts when a higher than threshold temperature is detected.
- Suprema Thermal Camera connects via USB interface making deployment quick and easy on new and retrofit installs.

Suprema

FaceStation 2 with Temperature Detection

Features



Enhanced security and safety

- Combination of face recognition and skin temperature measurement
- Audio and visual alerts with optional alarm
- Bypass mode for skin temperature measure only
- Temperature data can be optionally saved as event logs



Accurate temperature measurement

- Fast and accurate measurement using thermographic camera with 19,200 pixels per frame
- Does not require reference blackbody to measure temperature



Easy deployment

- Easy connection with FaceStation 2 via USB
- Comes with a bracket for convenient deployment on new and retrofit installs




Ergonomic design for convenience

- Supports extended height range of 145 cm–210 cm for face recognition and distance of 40 cm–80 cm for temperature measurement
- Intuitive GUI for notifications
- Temperature can be displayed both in Celsius and Fahrenheit


Specifications

Part Code	FS2-AWB-TCM10LA
Max. Resolution	120 × 160
NETD (Noise Equivalent Temperature Difference)	≤ 50 mK (@25°C, F# = 1.0)
Field of View	37.2° × 50° (H × V)
Temperature Range	30°C to 45°C (86°F to 113°F)
Temperature Accuracy	± 0.5°C (0.9°F)
Temperature Distance	Adjustable, 40 cm–80 cm (15.7" to 31.5")
Interface	USB
Operating Temperature	0°C to 50°C (32°F to 122 °F)
Dimensions (W × H × D)	Camera: 77 mm × 46 mm × 22.2 mm (3.03" × 1.81" × 0.87") Camera with Bracket: 139.84 mm × 163.8 mm × 22.8 mm (5.51" × 6.45" × 0.90")
Components	Reader With bracket and USB cable,
Firmware	v1.3.2 or v1.4.0 and above
Compatible BioStar 2	v2.8.2.90 or v2.8.5 and above

System Configurations

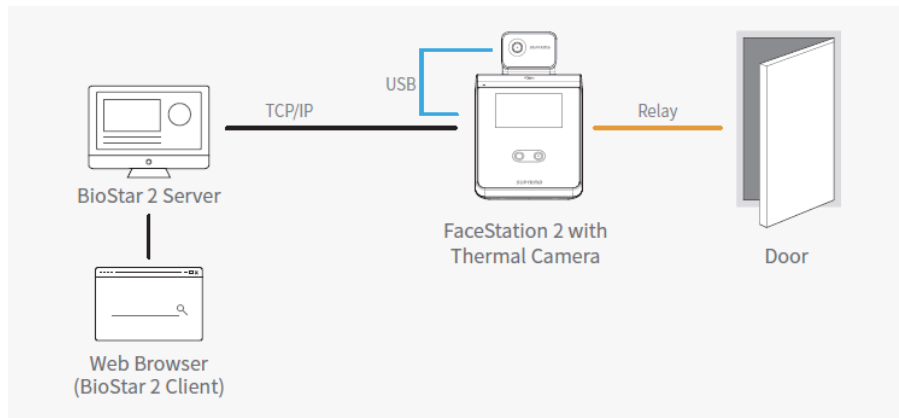

Operation Example

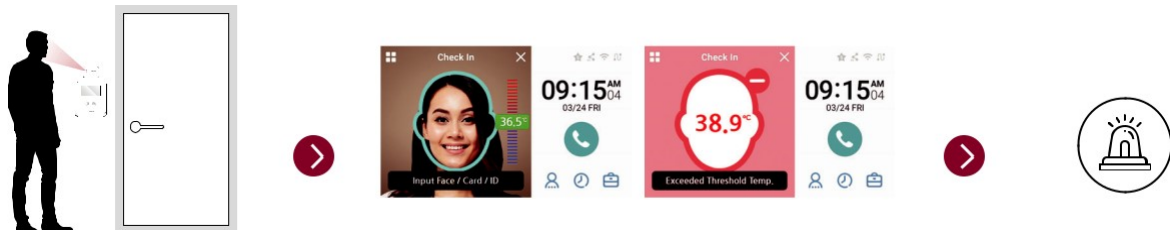

Suprema Inc.

17F Parkview Tower, 248, Jeongjail-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13554, Republic of Korea T +82 31 783 4502 E sales_sys@supremainc.com www.supremainc.com

©2020 Suprema Inc. Suprema and identifying product names and numbers herein are registered trade marks of Suprema, Inc. All non-Suprema brands and product names are trademarks or registered trademarks of their respective companies. Product appearance, build status and/or specifications are subject to change without notice. [SUPREMA-AHL-TCM10-EN-REV01]